


POINTS ALBI

5713

Embedded studs without protrusion

Discreet yet formidably effective, ALBI is the perfect floor recessed fixture to enhance the details of any interior. Compact and with no protruding parts, this small 4 LED spotlight is the mini version of the round adjustable recessed range. Its design allows 360° rotation within the recess, giving total freedom to adjust the luminous flux in the right direction, whatever the installation constraints. Its

light module can be tilted (-10°/+30°), allowing you to fine-tune the lighting effect. Ideal for highlighting architectural elements, street furniture or creating atmosphere in squares and public spaces. Combining robustness and elegance thanks to its colorless anodized machined aluminum bezel, this recessed luminaire is also available in four-color process.

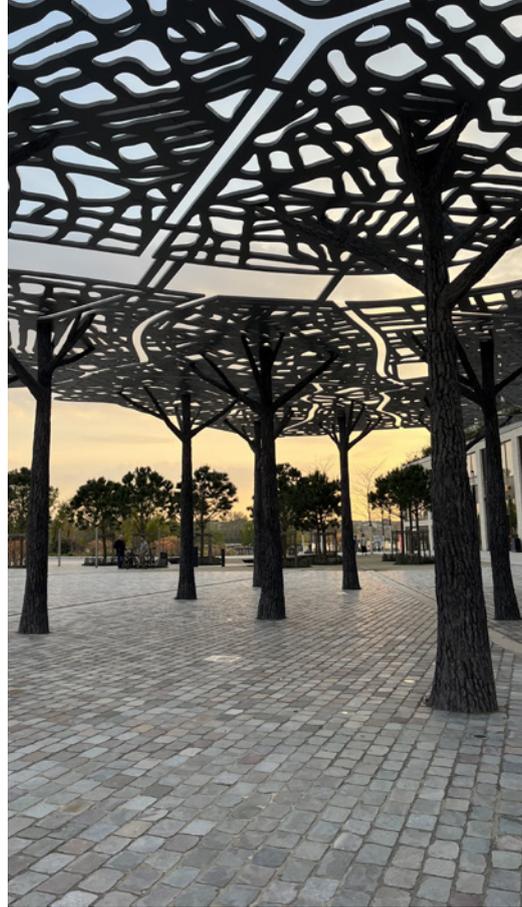

Credits from left to right:
1/3. © LEC - Bordeaux, France | 2. © LEC - Funchal, Portugal
4/5. © MFROMER - Sion, Switzerland

FEATURES

LUMINAIRE'S BODY

Materials	Clear anodized machined aluminium
IP rating	IP68
IK rating	IK10 60 J
Weight	0.96 kg
Cable length	100 cm
Features	2-axis adjustable Adjustable tray : - 10° à 30° Transparent flat window
Remote power supply via cable	24 V dc + PWM (class III) 230 V ac - non dimmable (class II)
Remote power supply in distant box	230 V ac -> 24 V dc + PWM Control possible via: 0-10 V, DMX, DALI, potentiometers




OPTICAL UNIT

Color temperature	2 200 K (A), 2 700 K (F), 3 000 K (E), 4 000 K (N), 6 000 K (W), Red (R), Amber (O), Green (V), Blue (L), Royal Blue (K)
Type of LED	Power LED
Optics	10°, 20°, 36°, 52°, 77°, 120°, 130 x 25° (L1), 116 x 44° (L2), 40 x 10° (L4), 130 x 25° D50° (L5), 116 x 44° D36° (L6), 100 x 20° (L7). See details in the "Photometric Specifications" document
Number of LED	4
Reference flux*	836 lm
Product reference	5713

*This value, obtained at the luminaire output, corresponds to the optimum number and type of LEDs for warm white light (3,000 K).

DIMENSIONS

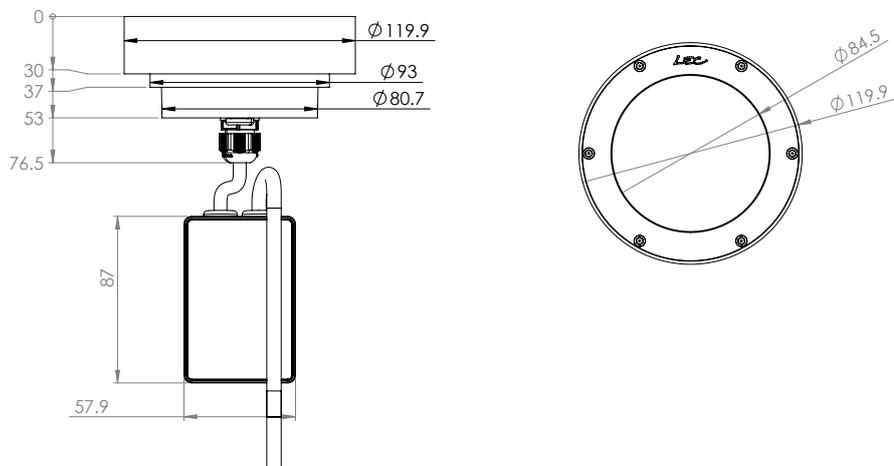

OPTIONS

Four-color
Mixed optics possible



ACCESSORIES

Choice of recessed mountings for installation:

- With extension
- Compact



CONFIGURATION GUIDE

Configuration example: [5713T-R-L2E](#)
(to be customized with the references below)

5713	T	R	L2E	
Reference	Power supply	Color	Optics	
				L2 Optics
				E Ellipse orientation
		R LED color		
		T Four-color		
		Ø 24 V controllable via PWM		
		T 230 V		
5713	ALBI			