



POINTS ALICANTE

5727

Embedded studs without protrusion

Offering optimum lighting flexibility, ALICANTE embodies elegance and performance. Compact and discreet, it adds a touch of luminous sophistication. With its IP68 rating and IK10 robustness, it guarantees exceptional durability, even in the most demanding environments. Optionally available with four-color printing, it offers dynamic color animations

to enhance and enhance a variety of spaces. What's more, its intelligent design features two independently tilting trays for optimum adjustment and precise, customized lighting. Whether to illuminate a facade or a garden, the ALICANTE spotlight adapts to your needs.



Credits from left to right:
1/3. © Camille Lafon - Nîmes, France
2/4. © Camille Lafon - Montpellier, France



FEATURES

LUMINAIRE'S BODY

Materials	Clear anodized machined aluminium
IP rating	IP68
IK rating	IK10 60 J - Occasional vehicle traffic
Weight	4.6 kg
Cable length	100 cm
Features	2-axis adjustable Adjustable orientation without disassembly Adjustable parallel trays: -3° à 25° Transparent flat window
Integrated power supply	230 V - non dimmable, 230 V + 0-10 V, 230 V + DMX, 230 V + DALI (class II)




OPTICAL UNIT

Color temperature	2 200 K (A), 2 700 K (F), 3 000 K (E), 4 000 K (N), 6 000 K (W), Red (R), Amber (O), Green (V), Blue (L), Royal Blue (K), Four-color (TW in RGBW)
Type of LED	Power LED
Maximum power consumption of all possible options	44.17 W
Optics	10°, 20°, 36°, 52°, 77°, 120°, 130 x 25° (L1), 116 x 44° (L2), 40 x 10° (L4), 130 x 25° D50° (L5), 116 x 44° D36° (L6), 100 x 20° (L7)
Number of LED	18
Reference flux*	3 762 lm
Product reference	5727

*This value, obtained at the luminaire output, corresponds to the optimum number and type of LEDs for warm white light (3,000 K).

DIMENSIONS

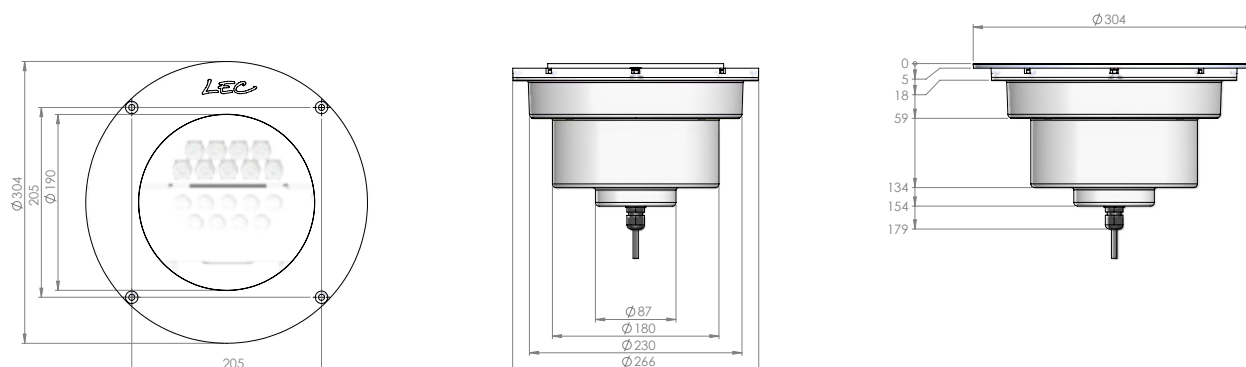

OPTIONS

Four-color
Mixed optics possible
Honeycomb louvre



ACCESSORIES

Choice of recessed mountings for installation:

- With extension
- Compact



CONFIGURATION GUIDE

Configuration example: 5727TY-R-L2E
(to be customized with the references below)

5727	T	Y	R	L2E
Reference	Power supply	Connector	Color	Optics
5727	ALICANTE	Ø 24 V controllable via PWM T 230 V TD 230 V controllable via DALI TV 230 V controllable via 0/10 V TX 230 V controllable via DMX	Ø Cable outlet Y Cable connector	Other Optics 2 x 9 LED in mono or 2 x 8 LED in quadri
				L3 2 x 6 LED - mono only
				L2 Optics
				E Ellipse orientation (E, S, W, N)
				R LED color T Four-color