



# POINTS ALICANTE

## 5727

Embedded studs without protrusion

Offering optimum lighting flexibility, ALICANTE embodies elegance and performance. Compact and discreet, it adds a touch of luminous sophistication. With its IP68 rating and IK10 robustness, it guarantees exceptional durability, even in the most demanding environments. Optionally available with four-color printing, it offers dynamic color animations

to enhance and enhance a variety of spaces. What's more, its intelligent design features two independently tilting trays for optimum adjustment and precise, customized lighting. Whether to illuminate a facade or a garden, the ALICANTE spotlight adapts to your needs.



Credits from left to right:  
1/3. © Camille Lafon - Nîmes, France  
2/4. © Camille Lafon - Montpellier, France



# FEATURES

## LUMINAIRE'S BODY

|                                |                                                                                                                                    |
|--------------------------------|------------------------------------------------------------------------------------------------------------------------------------|
| <b>Materials</b>               | Clear anodized machined aluminium                                                                                                  |
| <b>IP rating</b>               | IP68                                                                                                                               |
| <b>IK rating</b>               | IK10 60 J - Occasional vehicle traffic                                                                                             |
| <b>Weight</b>                  | 4.6 kg                                                                                                                             |
| <b>Cable length</b>            | 100 cm                                                                                                                             |
| <b>Features</b>                | 2-axis adjustable<br>Adjustable orientation without disassembly<br>Adjustable parallel trays: -3° à 25°<br>Transparent flat window |
| <b>Integrated power supply</b> | 230 V - non dimmable, 230 V + 0-10 V, 230 V + DMX, 230 V + DALI (class II)                                                         |




## OPTICAL UNIT

|                                                          |                                                                                                                                                   |
|----------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Color temperature</b>                                 | 2 200 K (A), 2 700 K (F), 3 000 K (E), 4 000 K (N), 6 000 K (W), Red (R), Amber (O), Green (V), Blue (L), Royal Blue (K), Four-color (TW in RGBW) |
| <b>Type of LED</b>                                       | Power LED                                                                                                                                         |
| <b>Maximum power consumption of all possible options</b> | 44.17 W                                                                                                                                           |
| <b>Optics</b>                                            | 10°, 20°, 36°, 52°, 77°, 120°, 130 x 25° (L1), 116 x 44° (L2), 40 x 10° (L4), 130 x 25° D50° (L5), 116 x 44° D36° (L6), 100 x 20° (L7)            |
| <b>Number of LED</b>                                     | 18                                                                                                                                                |
| <b>Reference flux*</b>                                   | 3 762 lm                                                                                                                                          |
| <b>Product reference</b>                                 | <b>5727</b>                                                                                                                                       |

\*This value, obtained at the luminaire output, corresponds to the optimum number and type of LEDs for warm white light (3,000 K).

## DIMENSIONS

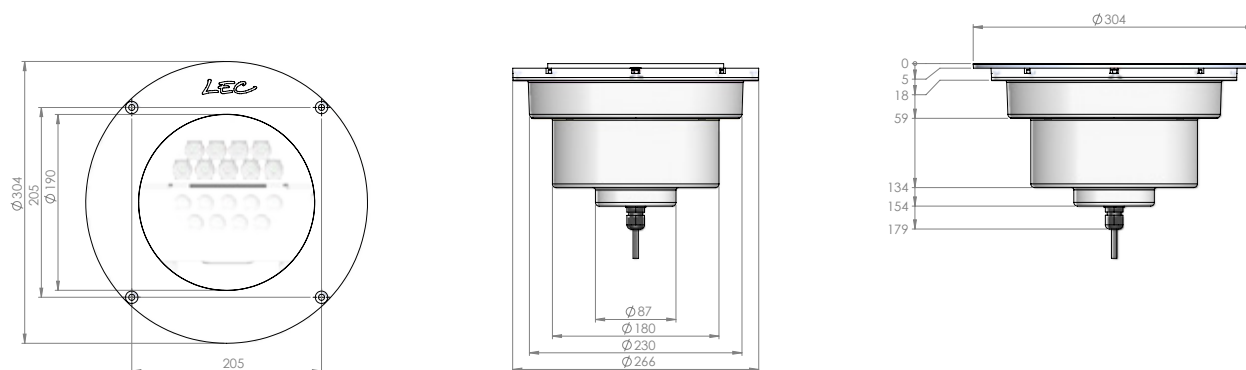

## OPTIONS

Four-color  
Mixed optics possible  
Honeycomb louvre



## ACCESSORIES

Choice of recessed mountings for installation:

- With extension
- Compact



## CONFIGURATION GUIDE

Configuration example: 5727TY-R-L2E  
(to be customized with the references below)

| 5727      | T            | Y                                                                                                                                          | R     | L2E                                                          |
|-----------|--------------|--------------------------------------------------------------------------------------------------------------------------------------------|-------|--------------------------------------------------------------|
| Reference | Power supply | Connector                                                                                                                                  | Color | Optics                                                       |
| 5727      | ALICANTE     |                                                                                                                                            |       | <b>Other Optics</b> 2 x 9 LED in mono or 2 x 8 LED in quadri |
|           |              |                                                                                                                                            |       | <b>L3</b> 2 x 6 LED - mono only                              |
|           |              |                                                                                                                                            |       | <b>L2</b> Optics                                             |
|           |              |                                                                                                                                            |       | <b>E</b> Ellipse orientation (E, S, W, N)                    |
|           |              |                                                                                                                                            |       | <b>R</b> LED color<br><b>T</b> Four-color                    |
|           |              | <b>Ø</b> Cable outlet<br><b>Y</b> Cable connector                                                                                          |       |                                                              |
|           |              | <b>T</b> 230 V<br><b>TD</b> 230 V controllable via DALI<br><b>TV</b> 230 V controllable via 0/10 V<br><b>TX</b> 230 V controllable via DMX |       |                                                              |