




5716

Embedded studs without protrusion

ALLEVARD is the mid-range version of our range of adjustable round recessed luminaires, offering optimum lighting flexibility. Thanks to its 360° rotation in the recessed housing, it can be used to direct the luminous flux with precision, without any installation constraints. Its LED plate can be tilted from 0° to 25°, and is easy to adjust from the outside, with no need

for dismantling and no impact on waterproofing. Ideal for lighting facades, highlighting architectural details, and street furniture, ALLEVARD blends perfectly into public spaces. Robust and discreet, it is designed to withstand demanding environments. Available in four-color versions, it can also be used to create dynamic, customized lighting atmospheres.

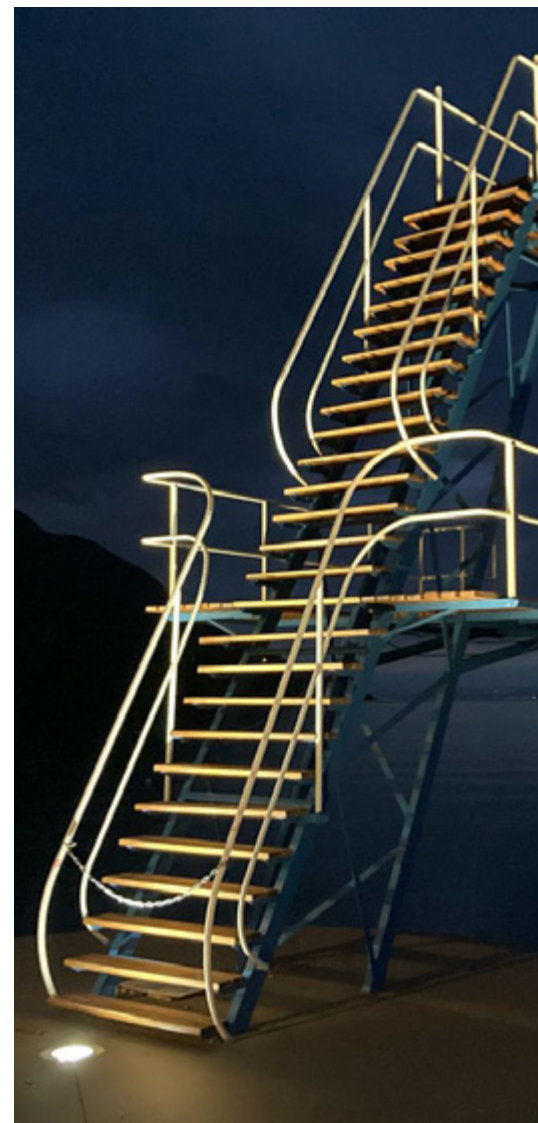


Credits from left to right:
 1. © LEC - Santarem, Portugal | 2. © 11h45 - Paris, France
 3. © Les éclaireurs - Paris, France | 4. © MFROMER - Martigny, Switzerland
 5. © LEC - Saint-Gingolph, France

FEATURES

LUMINAIRE'S BODY

Materials	Clear anodized machined aluminium
IP rating	IP68
IK rating	IK10 - Occasional vehicle traffic
Weight	2.3 kg
Cable length	100 cm
Features	2-axis adjustable Adjustable orientation without disassembly Adjustable tray : 0° à 25° Transparent flat window
Integrated power supply	24 V dc + PWM (class III)
Remote power supply via cable	230 V ac - non dimmable, 230 V ac + 0–10 V, 230 V ac + DALI (class II)
Remote power supply in distant box	230 V ac -> 24 V dc + PWM Control possible via: 0–10 V, DMX, DALI, potentiometers


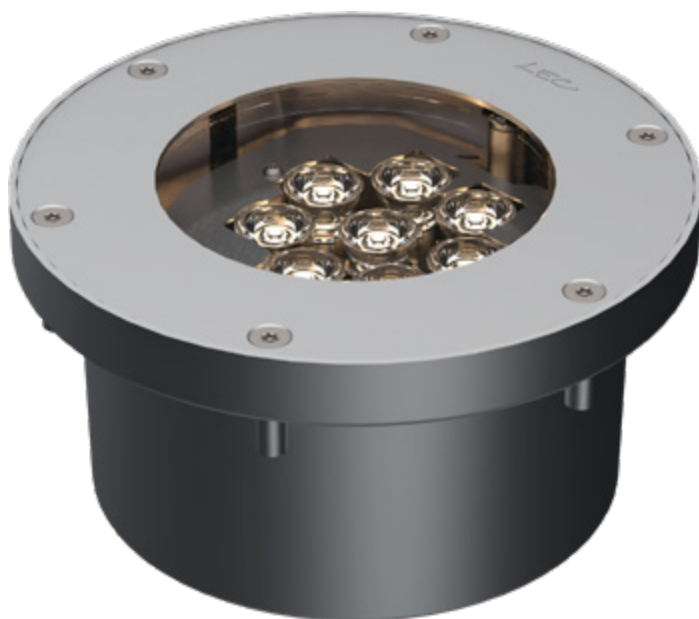


OPTICAL UNIT

Color temperature	2 200 K (A), 2 700 K (F), 3 000 K (E), 4 000 K (N), 6 000 K (W), Red (R), Amber (O), Green (V), Blue (L), Royal Blue (K), Four-color (TW in RGBW)
Type of LED	Power LED
Maximum power consumption of all possible options	21.35 W
Optics	10°, 20°, 36°, 52°, 77°, 120°, 130 x 25° (L1), 116 x 44° (L2), 40 x 10° (L4), 130 x 25° D50° (L5), 116 x 44° D36° (L6), 100 x 20° (L7)
Number of LED	8
Reference flux*	1 672 lm
Product reference	5716


*This value, obtained at the luminaire output, corresponds to the optimum number and type of LEDs for warm white light (3,000 K).

DIMENSIONS

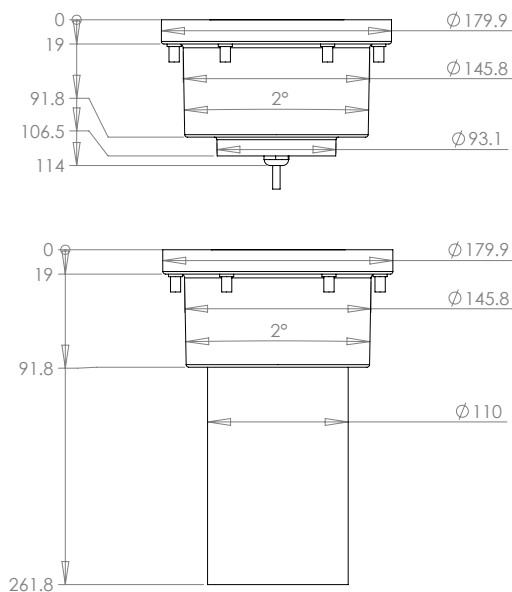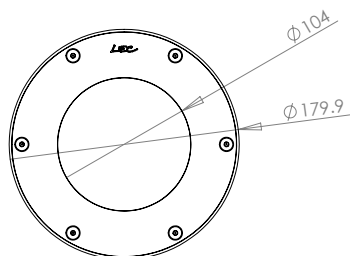

OPTIONS

Four-colour
Mixed optics possible
Honeycomb louvre



ACCESSORIES

Choice of recessed mountings for installation:

- With extension
- Compact



CONFIGURATION GUIDE

Configuration example: 5716TY-R-L2E
(to be customized with the references below)

5716	T	Y	R	L2E
Reference	Power supply	Connector	Color	Optics
5716 ALLEVARD		Ø Cable outlet Y Cable connector Ø 24 V controllable via PWM UD 24 V controllable via DALI UX 24 V controllable via DMX T 230 V TD 230 V controllable via DALI TV 230 V controllable via 0/10 V TX 230 V controllable via DMX		L2 Optics E Ellipse orientation (E, S, W, N)
				R LED color
				T Four-color