



LINES ARCHES

5632-5633

Wall-mounted

Compact, precise, and discreet, ARCHES is the linear spotlight designed to sublimate architectural details with elegance. Specially designed for installation on windowsills, cornices, or architectural lines, it provides even, grazing lighting that subtly enhances volumes. For facade

installations, a selection of optics enables the angle of opening to be adapted to cover great heights or to obtain an even coating, even in a grazing position. Available in 3 or 6 LED versions, with a choice of powder-coated finishes, ARCHES can be integrated into any lighting project.


Credits from left to right:
1. © LEC - Saint-Tropez, France | 2. © LEC - Genève, Switzerland
3. © LEC - Marseillan, France | 4. © LEC - Jette, Belgium | 5. © LEC - Paris, France



FEATURES

LUMINAIRE'S BODY

Materials	Clear anodized machined aluminium
IP rating	IP67
IK rating	IK10 20 J - Not designed for vehicle traffic
Weight	-
Cable length	100 cm
Features	1-axis adjustable : -10° à 90° Transparent flat window
Integrated power supply	24 V dc + PWM (class III)
Remote power supply in distant box	230 V ac -> 24 V dc + PWM Control possible via: 0-10 V, DMX, DALI, potentiometers

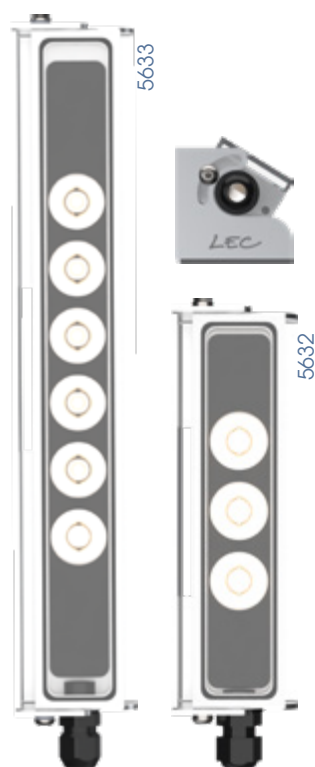

OPTICAL UNIT

Color temperature	2 200 K (A), 2 700 K (F), 3 000 K (E), 4 000 K (N), 6 000 K (W), Red (R), Amber (O), Green (V), Blue (L), Royal Blue (K)	
Type of LED	Power LED	
Maximum power consumption of all possible options	7.8 W	15.4 W
Optics	10°, 20°, 36°, 52°, 77°, 120°, 130 x 25° (L1), 116 x 44° (L2), 100 x 12° (L3), 40 x 10° (L4), 130 x 25° D50° (L5), 116 x 44° D36° (L6), 100 x 20° (L7)	
Number of LED	3	6
Reference flux*	627 lm	1 254 lm


Product reference

5632

5633

*This value, obtained at the luminaire output, corresponds to the optimum number and type of LEDs for warm white light (3,000 K).

DIMENSIONS

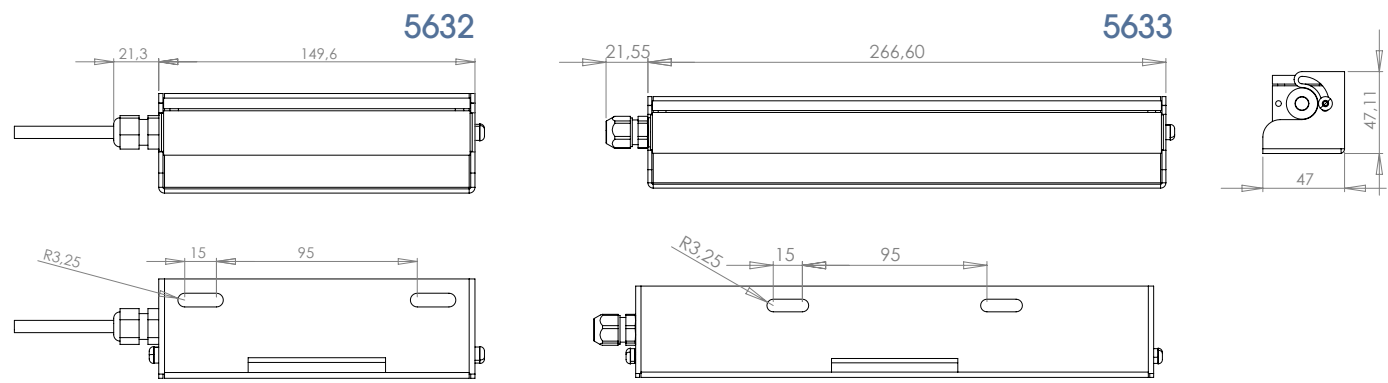

OPTIONS

5632
Lyre RAL powder coating paint of your choice
Mixed optics possible

5633
Trichromy
Lyre RAL powder coating paint of your choice
Mixed optics possible

CONFIGURATION GUIDE

Configuration example: 5633YPS-R-L2E
(to be customized with the references below)

5633	Y	PS	R	L2E
Reference	Connector	Painting	Color	Optics
5632 ARCHES 5633 ARCHES		(option)	R LED color T Trichromy	L2 Optics
		Ø Unpainted		E Ellipse orientation (E, S, W, N)
		PS Special painting		
		5632 Ø AD8 cable + cable gland		
		5633 Ø Cable outlet		
	Y Cable connector			