





5651-5652-5653-5654

Wall-mounted

CLEM is a versatile light bar, available in four lengths, ideal for elegantly emphasizing architectural lines or visually structuring a space. Installed individually or in a continuous line, it creates clean, regular lighting perspectives. Thanks to its extensive asymmetrical optics, CLEM provides uniform illumination, even when installed flush, ensuring subtle

highlights. A range of mounting accessories, both fixed and swivel-mounted, enables integration to suit every project. Designed for a wide range of uses, CLEM can be used for both direct and indirect lighting in public spaces, on covered walkways or as a decorative highlight. A four-color version is also available for customized lighting atmospheres.

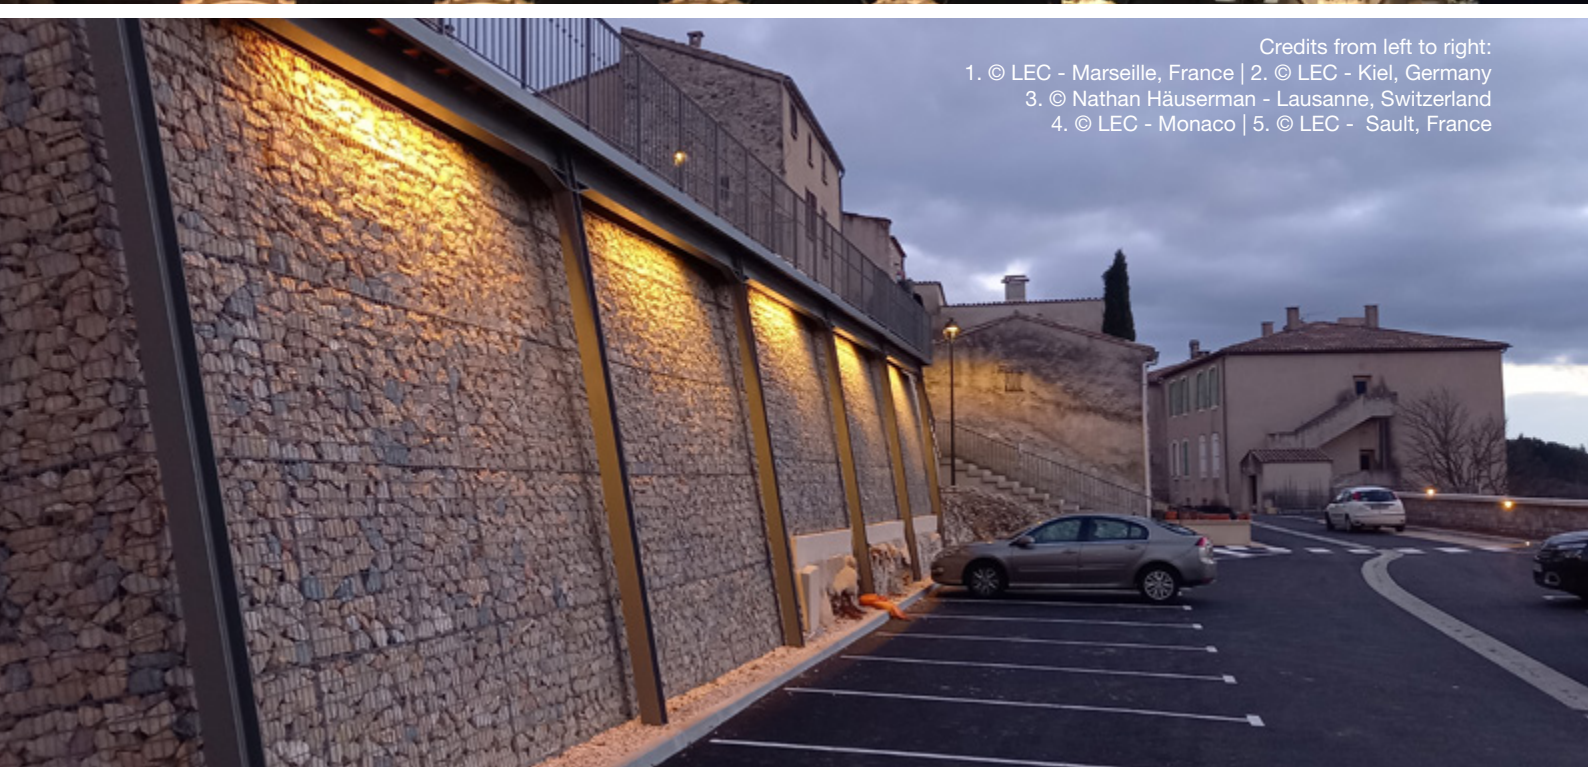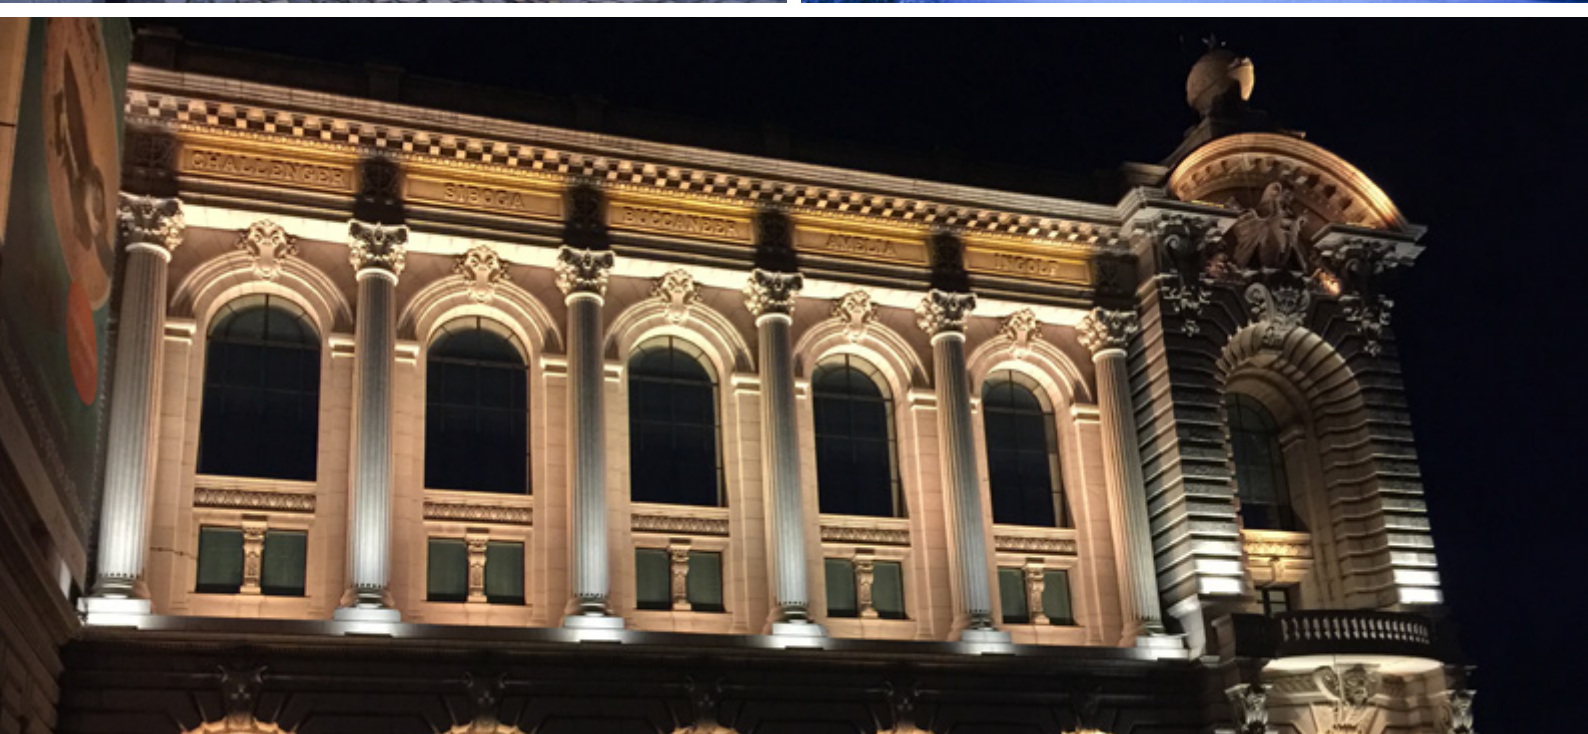

Credits from left to right:
 1. © LEC - Marseille, France | 2. © LEC - Kiel, Germany
 3. © Nathan Häuserman - Lausanne, Switzerland
 4. © LEC - Monaco | 5. © LEC - Sault, France

FEATURES

LUMINAIRE'S BODY

Materials	UV-resistant polycarbonate			
IP rating	IP67			
IK rating	IK06			
Cable length	100 cm			
Features	Transparent flat window			
Weight	1.1 kg	0.8 kg	0.55 kg	0.3 kg
Length	196.5 cm	148.5 cm	100.5 cm	52.5 cm
Integrated power supply	24 V dc + PWM (class III)			
Remote power supply in distant box	230 V ac -> 24 V dc + PWM Control possible via: 0-10 V, DMX, DALI, potentiometers			



OPTICAL UNIT

Color temperature	2 200 K (A), 2 700 K (F), 3 000 K (E), 4 000 K (N), 6 000 K (W), Red (R), Amber (O), Green (V), Blue (L), Royal Blue (K), Four-color (TW in RGBW)			
Type of LED	Power LED			
Maximum power consumption of all possible options	67.2 W	50.4 W	33.6 W	16.8 W
Optics	10°, 20°, 36°, 52°, 77°, 120°, 130 x 25° (L1), 116 x 44° (L2), 100 x 12° (L3), 40 x 10° (L4), 130 x 25° D50° (L5), 116 x 44° D36° (L6), 100 x 20° (L7)			
Number of LED	24	18	12	6
Reference flux*	5 016 lm	3 762 lm	2 508 lm	1 254 lm

Product reference

5651


5652

5653

5654

*This value, obtained at the luminaire output, corresponds to the optimum number and type of LEDs for warm white light (3,000 K).

DIMENSIONS

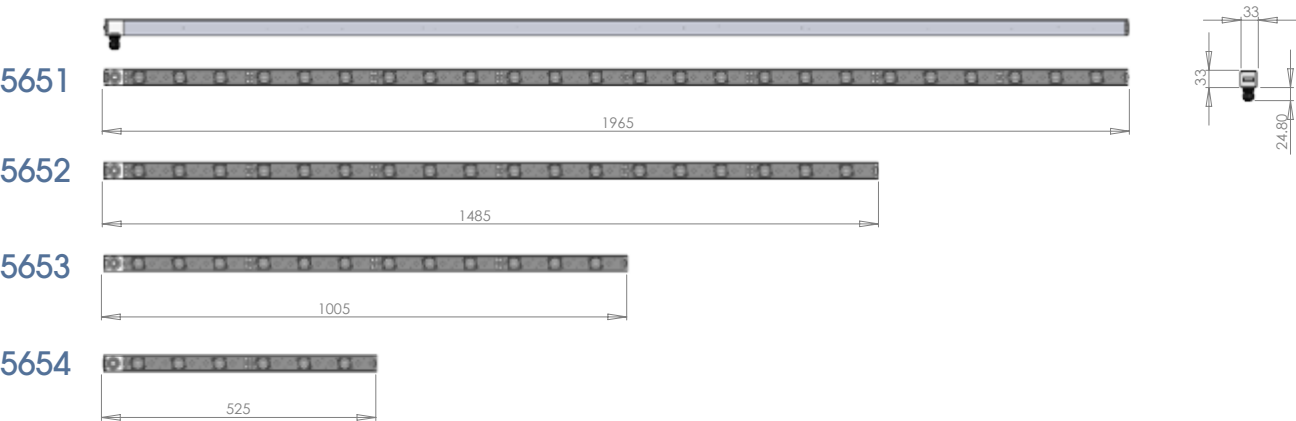

OPTIONS


- 5651**
Four-colour (64 led 1W)
Mixed optics possible
- 5652**
Four-colour (48 led 1W)
Mixed optics possible
- 5653**
Four-colour (32 led 1W)
Mixed optics possible
- 5654**
Four-colour (16 led 1W)
Mixed optics possible



ACCESSORIES

5651 / 5652 / 5653 / 5654
Various mounting accessories available
(fixed or rotating)

CABLE GLAND OUTLET

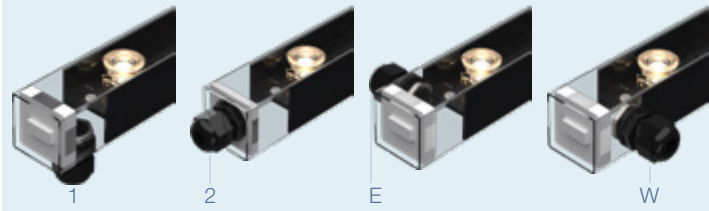

CONFIGURATION GUIDE

Configuration example: **5651PE-W-L4E**
(to be customized with the references below)

5651	P	E	W	L4E
Reference	Connector	Cable outlet	Color	Optics
5651 5652 5653 5654	CLEM	P Cable gland outlet, 100 cm cable Y Connector output on 30 cm cable	W LED color T Four-color	L4 Optics E Ellipse orientation (E, S, W, N)
			W	
			E	
			2	
			1	