



LINES LIGNON

5655

Wall-mounted

Designed for surface-mounting or mounting on any type of architectural support, LIGNON is a versatile line. Available in lengths from 13 cm to 200 cm, it can be installed individually or in a continuous line for seamless, smooth lighting. Its slightly diffusing polycarbonate profile prevents glare, while the clip-on assembly with the aluminum profile allows precise

orientation of the luminous flux. The integrated slot facilitates adjustment of fasteners via nuts, ensuring simple, stable installation. Thanks to a wide choice of mounting brackets, LIGNON adapts perfectly to cornices, walls, benches, or street furniture. Its discreet, in-line cable outlet enhances its elegant integration into the space.


Credits from left to right:
1. © LEC - Montpellier, France | 2. © LEC - Viens, France
3. © LEC - Houdeng, Belgium | 4. © LEC - Salon-de-Provence, France



FEATURES

LUMINAIRE'S BODY

Materials	Clear anodized machined aluminium
IP rating	IP66
IK rating	IK06 - Not designed for vehicle traffic
Weight	300 g/m
Cable length	100 cm
Features	Slightly frosted window Length: from 13 cm to 200 cm
Integrated power supply	24 V dc + PWM (class III)
Remote power supply in distant box	230 V ac -> 24 V dc + PWM Control possible via: 0-10 V, DMX, DALI, potentiometers

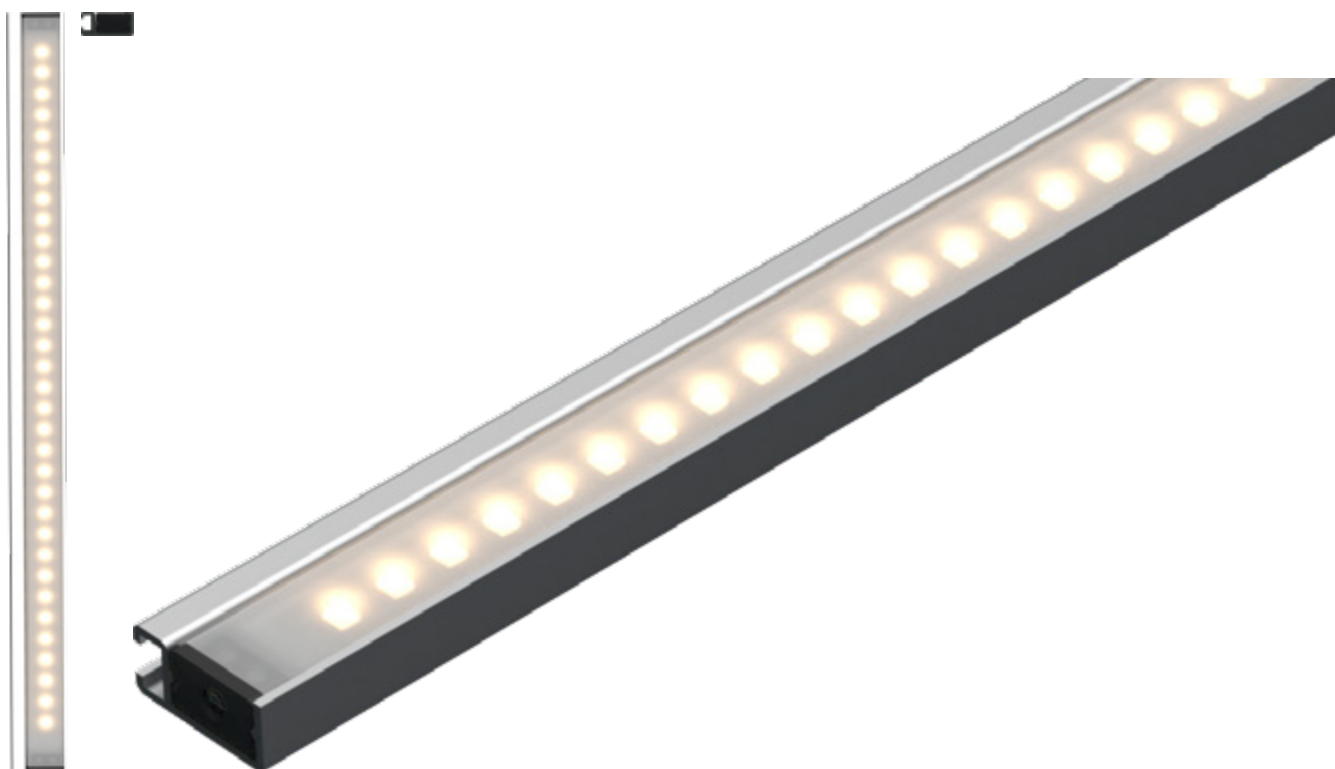


OPTICAL UNIT

Color temperature	2 200 K (A), 2 700 K (F), 3 000 K (E), 4 000 K (N), 6 000 K (W), Red (R), Amber (O), Green (V), Blue (L), Royal Blue (K)
Type of LED	Light marking LED (S), Light marking LED high intensity (Z)
Maximum power consumption of all possible options	14.4 W
Optics	120°
Number of LED	120
Reference flux*	1 016 lm

Product reference **5655**

**This value, obtained at the luminaire output, corresponds to the optimum number and type of LEDs for warm white light (3,000 K).*

DIMENSIONS

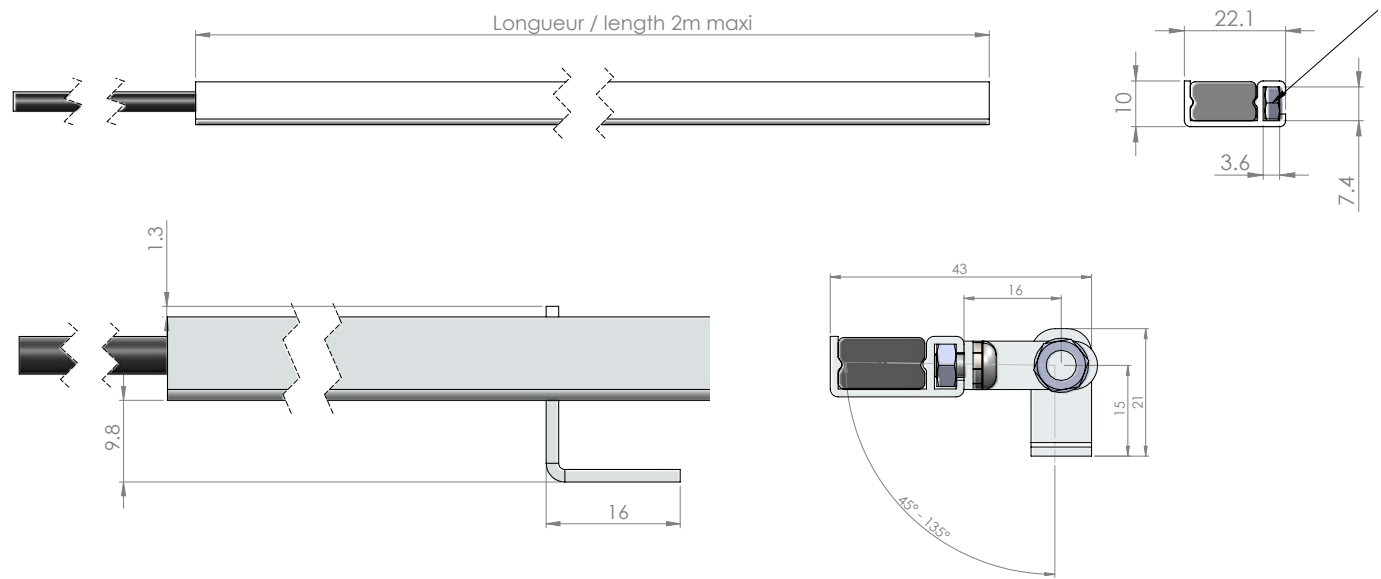

ACCESSORIES

5655

Various mounting accessories available (fixed or rotating)



CONFIGURATION GUIDE

Configuration example: 5655-SO
(to be customized with the references below)

5655 Reference	S LED	O Color	O LED color
5655 LIGNON	S 120 SMD LED Z 120 high-power SMD LED		