



5681-5682-5683

Wall-mounted

LIMA is a linear lighting solution designed to enhance walls and facades thanks to its uniform, powerful luminous flux, even at great heights. Surface-mounted and adjustable, it adapts perfectly to the need for direct or indirect lighting, while guaranteeing discreet integration thanks to its sleek design. LIMA can also be used to create continuous lines

for a fluid visual effect, ideal for both architecture and public spaces. Available in four-color process or MAM* versions, it can be adapted to any context and lighting environment. What's more, customizable powder-coating is available on request for perfect harmony with the environment.

*MAM (War memorial): Special version allowing the colors of the national flag to be projected onto memorials, reinforcing the symbolic and patriotic character of the sites.

Credits from left to right:

1. © LEC - Auvelais, Belgium

2. © LEC - Comines, France

3. © Xavier Chabert - Jonage, France


4. © Jean-Philippe Humbert - Paris, France



FEATURES

LUMINAIRE'S BODY

Materials	Clear anodized machined aluminium		
IP rating	IP67		
IK rating	IK10 20 J		
Cable length	200 cm		
Features	Transparent flat window		
Weight	4.7 kg	3.6 kg	2.5 kg
Length	92 cm	70 cm	48.5 cm
Integrated power supply	230 V ac - non dimmable, 230 V ac - 0/10 V, 230 V ac + DALI, 230 V + DMX (class II)		

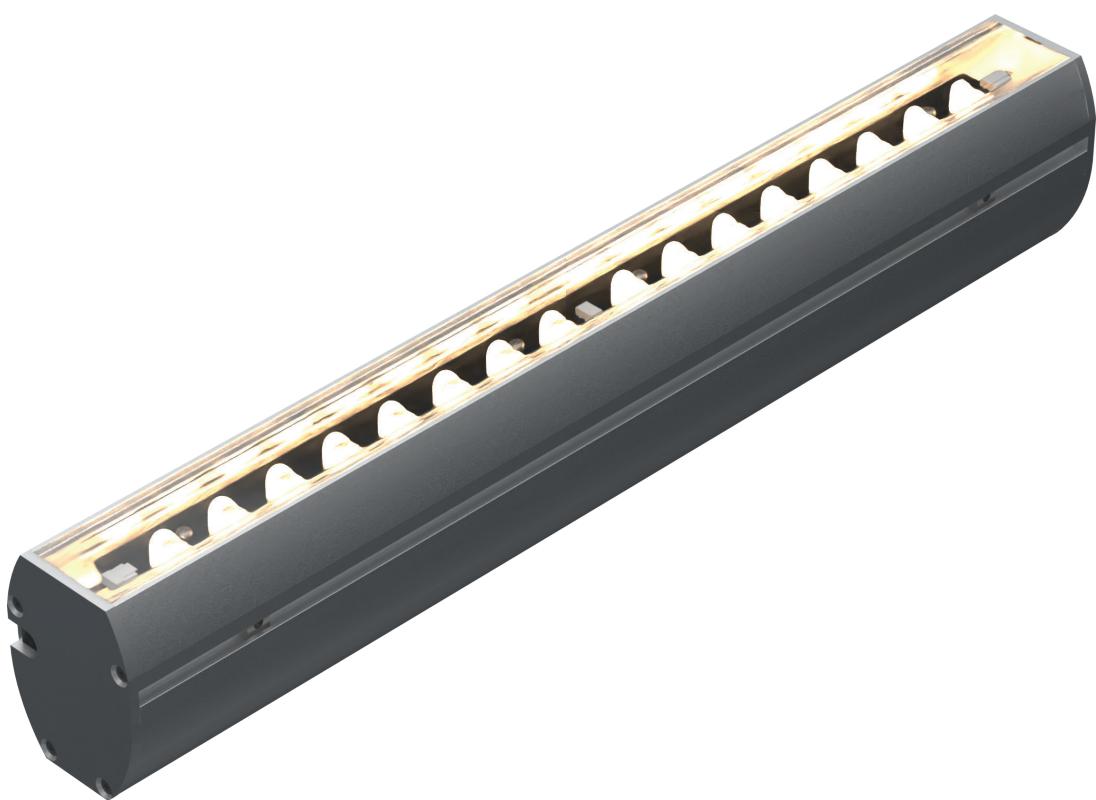

OPTICAL UNIT

Color temperature	2 200 K (A), 2 700 K (F), 3 000 K (E), 4 000 K (N), 6 000 K (W), Red (R), Amber (O), Green (V), Blue (L), Royal Blue (K), Four-color (TW in RGBW)		
Type of LED	Power LED		
Optics	10°, 20°, 36°, 52°, 77°, 120°, 130 x 25° (L1), 116 x 44° (L2), 100 x 12° (L3), 40 x 10° (L4), 130 x 25° D50° (L5), 116 x 44° D36° (L6), 100 x 20° (L7). See details in the "Photometric Specifications" document		
Number of LED	32	24	16
Reference flux*	6 688 lm	5 016 lm	3 344 lm
Product reference	5681	5682	5683

*This value, obtained at the luminaire output, corresponds to the optimum number and type of LEDs for warm white light (3,000 K).

DIMENSIONS



OPTIONS

5681

RAL powder coating paint of your choice
Four-colour
Mixed optics possible
War memorial version (the color of your flag)

5682 / 5683


RAL powder coating paint of your choice
Four-colour
Mixed optics possible



5681 / 5682 / 5683

Cap
Various mounting accessories available fixed or rotating.

- PF1: 2 mounting brackets L:30cm
- PF2: 2 mounting brackets L:15cm
- PE3: 2 surface-mounted brackets

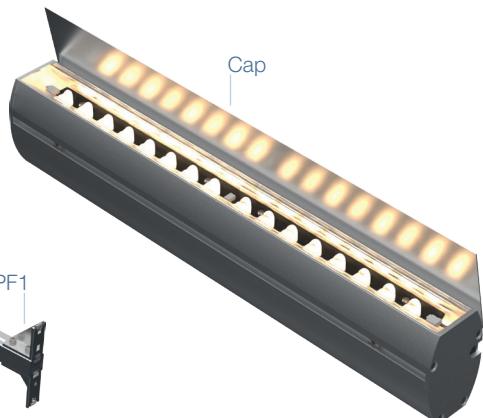

CONFIGURATION GUIDE

Configuration example: 5681TDYPS-W-L4W
(to be customized with the references below)

5681	TD	Y	PS	W	L4W
Reference	Power supply	Connector	Painting	Color	Optics
					F3 Mix of optics for facade lighting L4 Optics W Ellipse orientation (E, S, W, N)
			(option)	W LED color TW Four-color MAM The color of your flag	
				Ø Unpainted PS With paint	
		Ø Cable outlet Y Cable connector			
	T 230 V non dimmable TD 230 V controllable via DALI TV 230 V controllable via 0/10 V TX 230 V controllable via DMX				
5681	LIMA				
5682	LIMA				
5683	LIMA				