

SPOTS LUMINY

4010

Wall-mounted & mast

LUMINY is the “mini” version of the spotlight range, offering a compact, versatile solution for urban lighting. It can be installed on the ground, as a surface-mounted or pole-mounted luminaire, with Accessories adaptable for each configuration. This luminaire is ideal for highlighting subtle architectural details, small pathways, or street furniture. Its

316L stainless steel yoke and screws guarantee resistance to outdoor conditions. What's more, a powder-coated finish is available on request to personalize its appearance and integrate it perfectly into its surroundings. LUMINY combines performance, durability, and elegant design, making it the perfect choice for illuminating different spaces with finesse.



Credits from left to right:
1. © LEC - Paris, France | 2. © LEC - Valenciennes, France | 3. © LEC - Rabat, Morocco



FEATURES

LUMINAIRE'S BODY

Materials	Clear anodized machined aluminium
IP rating	IP67
IK rating	IK10 20 J - Not designed for vehicle traffic
Weight	0.22 kg
Cable length	100 cm
Features	2-axis adjustable Transparent flat window
Integrated power supply	24 V dc + PWM (class III)
Remote power supply in distant box	230 V ac -> 24 V dc + PWM Control possible via: 0-10 V, DMX, DALI, potentiometers



OPTICAL UNIT


Color temperature	2 200 K (A), 2 700 K (F), 3 000 K (E), 4 000 K (N), 6 000 K (W), Red (R), Amber (O), Green (V), Blue (L), Royal Blue (K)
Type of LED	Power LED
Maximum power consumption of all possible options	3.1 W
Optics	10°, 20°, 36°, 52°, 77°, 120°, 130 x 25° (L1), 116 x 44° (L2), 40 x 10° (L4), 100 x 20° (L7).
Number of LED	1
Reference flux*	209 lm

Product reference

4010

**This value, obtained at the luminaire output, corresponds to the optimum number and type of LEDs for warm white light (3,000 K).*

DIMENSIONS

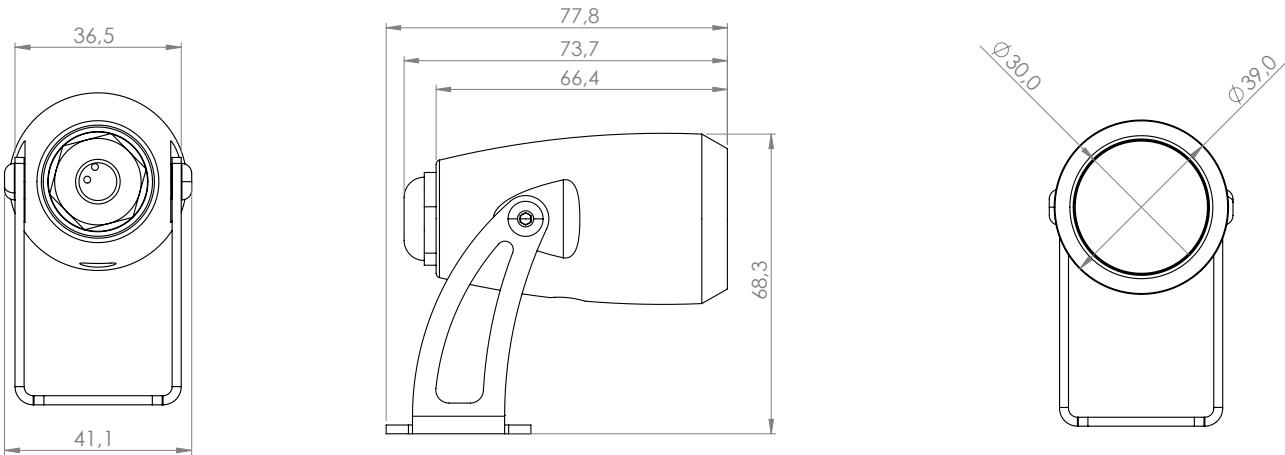

OPTIONS

RAL powder coating paint of your choice
Honeycomb louvre



ACCESSORIES

Mounting plates for poles with

- Ø 106 mm (R53)
- Ø 180 mm (R90)



CONFIGURATION GUIDE

Configuration example: [4010YPS-R-L2E](#)
(to be customized with the references below)

4040 Reference	Y Connector	PS Painting	R Color	L2E Optics
4010 LUMINY		(option)		
		Ø Without painting		
		PS Special painting		
		Ø Cable outlet		
		Y Cable connector		

L2 Optics
E Ellipse orientation (E, S, W, N)

R LED color