



EXTRAS OPERA

5637

Wall-mounted

With its sleek and discreet design, the OPERA spotlight is designed to enhance architecture with a continuous line of light, offering 180° diffusion. Powered by 24VDC or 230VAC, it is available in single input or input/output versions to suit different installation configurations. Its black anodization

makes it perfectly discreet, and a custom painted finish is also available. Thanks to its 180x4° optics, OPERA highlights every architectural detail with precision and elegance, creating subtle light effects on facades, window edges, or covered pathway.

Credits from left to right:
1/3. © LEC - Paris, France
2/4. © LEC - Saint-Martin-en-Haut, France



OPERA

FEATURES

LUMINAIRE'S BODY

Materials	Black anodized aluminium
IP rating	IP65
IK rating	IK10 20 J - Not designed for vehicle traffic
Weight	0.48 kg
Cable length	30 cm
Integrated power supply	24 V dc + PWM (class III) 230 V ac - non-dimmable (class II)
Remote power supply in distant box	230 V ac -> 24 V dc + PWM Control possible via: 0-10 V, DMX, DALI, potentiometers




OPTICAL UNIT

Color temperature	2 200 K (A), 2 700 K (F), 3 000 K (E), 4 000 K (N), 6 000 K (W), Red (R), Amber (O), Green (V), Blue (L), Royal Blue (K)
Type of LED	Power LED
Maximum power consumption of all possible options	2.32 W
Optics	180 x 4°. See details in the "Photometric Specifications" document
Number of LED	1
Reference flux*	223 lm

Product reference **5637**

**This value, obtained at the luminaire output, corresponds to the optimum number and type of LEDs for warm white light (3,000 K).*

DIMENSIONS

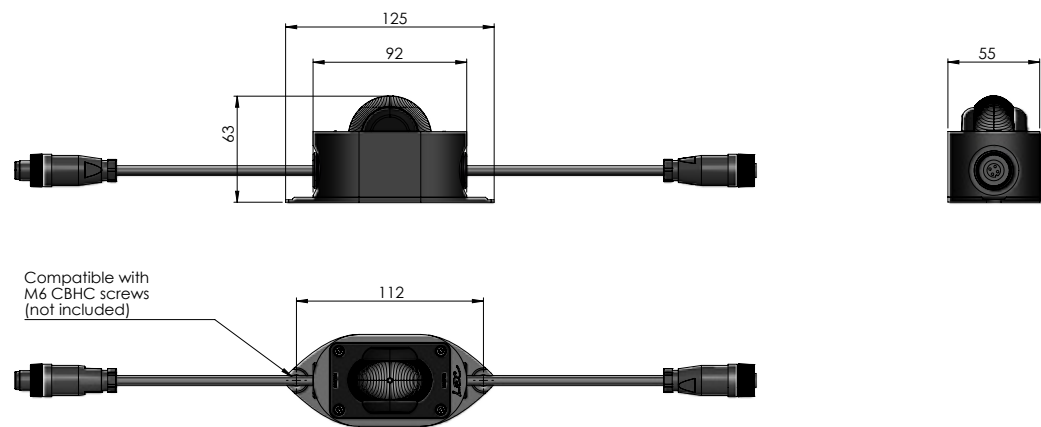


OPTIONS

Painting with RAL powder coating of your choice (unpainted black Optics block)



ACCESSORIES

Raw or painted facing plate, RAL color of your choice

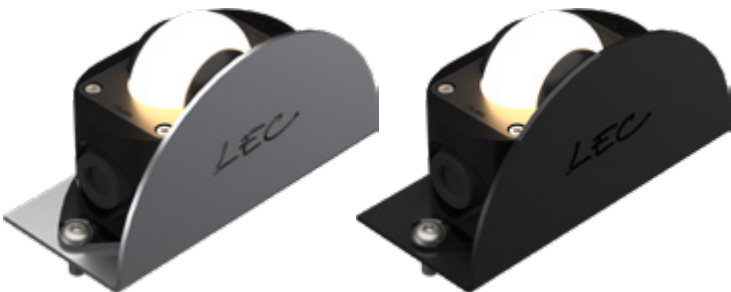

CONFIGURATION GUIDE

Configuration example: 5637YYPS-R
(to be customized with the references below)

5637	T	YY	PS	R
Reference	Power supply	Cable	Painting	Color
5637	OPERA	Ø 24 V dc + PWM H 230 V ac	Y Cable Connector, single-entry version (end of line) YY Connectors on cable, input/output version (start and middle of line)	R LED color Ø Black anodized body and plate, black lens cover PS Body and plate painted in RAL color of your choice