





# EXTRAS SAINT-JEAN

## 4330

Wall-recessed & mast

SAINT-JEAN is a recessed spotlight with a slight 3 mm projection, or with no projection in the bollard version, specially designed for lighting pedestrian and cycle paths. Installed less than a meter from the ground, it offers a discreet and effective solution for illuminating large areas with long spacing, up to 6 meters. Thanks to its specific H30 and H60 optics, it provides even, appropriate lighting, ideal for

public spaces. The beam can be tilted from 0 to 30° without having to open the fixture, guaranteeing a perfect seal. Available with two different flush-mount pot sizes, SAINT-JEAN can also be customized with a powder-coated finish for optimum aesthetic integration. Versatile and elegant, it blends harmoniously into different urban environments.

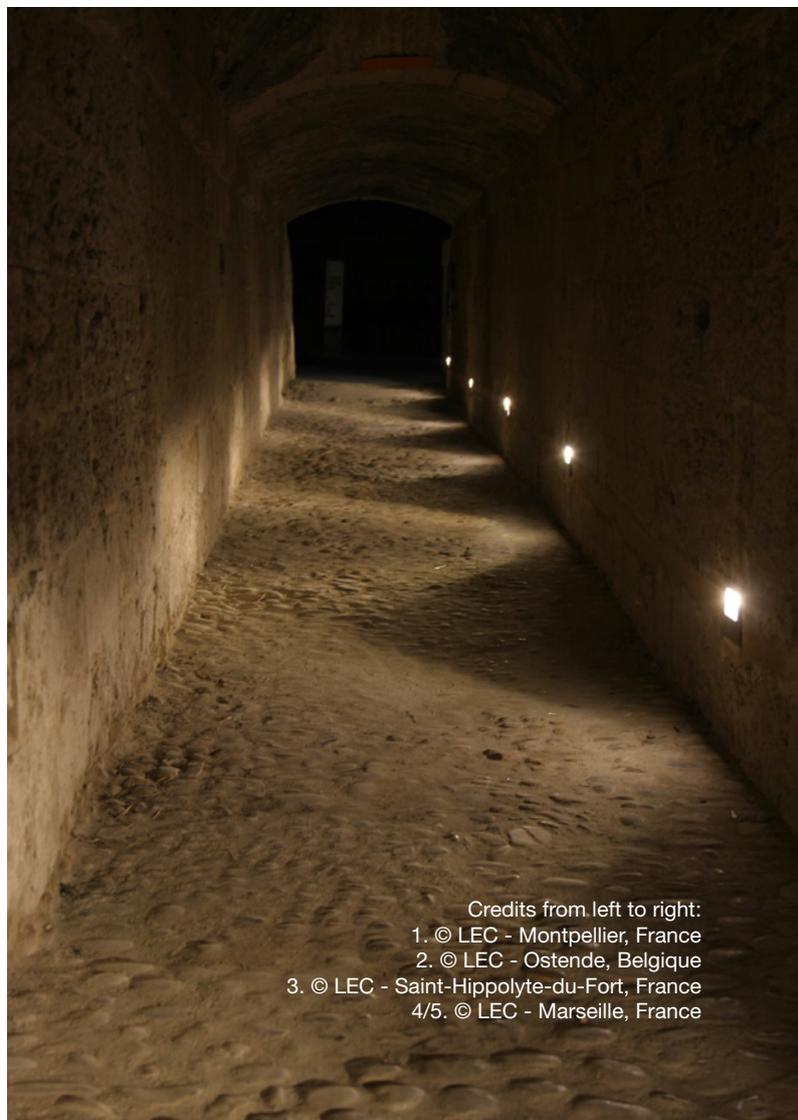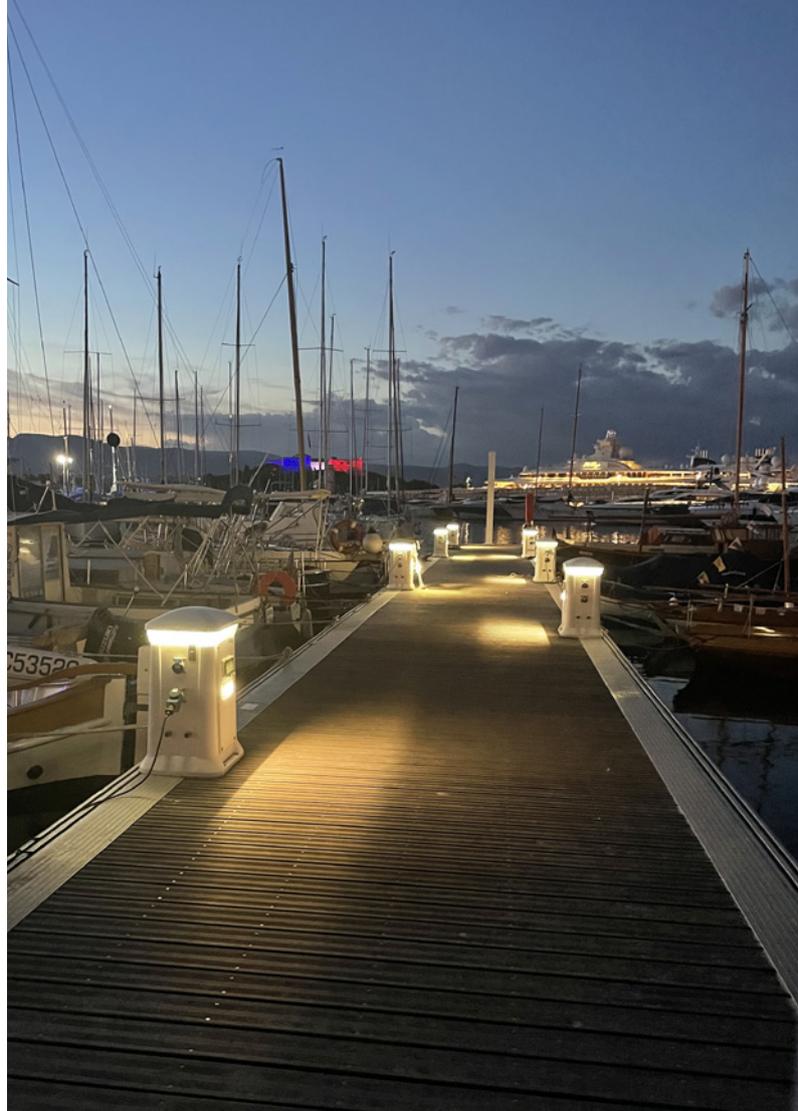

Credits from left to right:  
1. © LEC - Montpellier, France  
2. © LEC - Ostende, Belgique  
3. © LEC - Saint-Hippolyte-du-Fort, France  
4/5. © LEC - Marseille, France

# FEATURES

## LUMINAIRE'S BODY

<b>Materials</b>	Anodized aluminium
<b>IP rating</b>	IP67
<b>IK rating</b>	IK10 20 J
<b>Weight</b>	2.08 kg
<b>Cable length</b>	100 cm
<b>Features</b>	1-axis adjustable Adjustable orientation without disassembly Adjustable tray: 0 to 30°
<b>Integrated power supply</b>	24 V dc + PWM (class III) 230 V ac - non-dimmable (class II)
<b>Remote power supply in distant box</b>	230 V ac -> 24 V dc + PWM Control possible via: 0-10 V, DMX, DALI, potentiometers




## OPTICAL UNIT

<b>Color temperature</b>	2 200 K (A), 2 700 K (F), 3 000 K (E), 4 000 K (N), 6 000 K (W), Red (R), Amber (O), Green (V), Blue (L), Royal Blue (K)
<b>Type of LED</b>	Power LED
<b>Optics</b>	10°, 20°, 36°, 52°, 77°, 120°, 130 x 25° (L1), 116 x 44° (L2), 40 x 10° (L4), 100 x 20° (L7). See details in the "Photometric Specifications" document
<b>Number of LED</b>	3 / 4
<b>Reference flux*</b>	892 lm
<b>Product reference</b>	<b>4330</b>

\*This value, obtained at the luminaire output, corresponds to the optimum number and type of LEDs for warm white light (3,000 K).

## DIMENSIONS

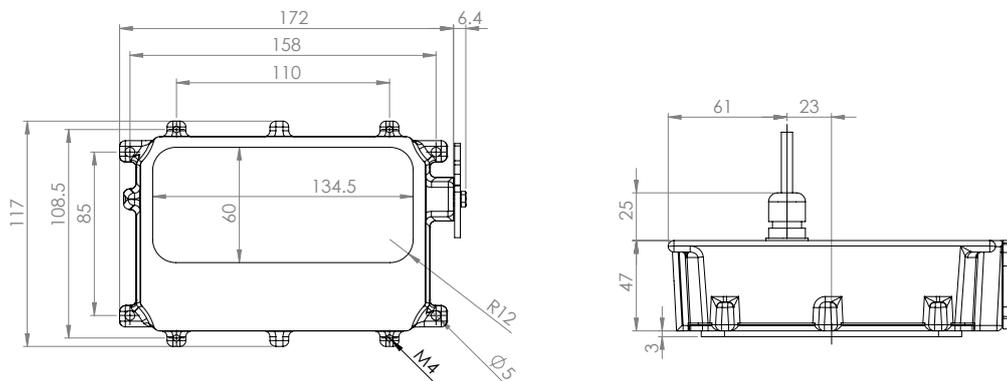

## OPTIONS

RAL powder coating paint of your choice  
Various angles of light beam opening

## ACCESSORIES

Choice of recessed mountings for installation:  
- with extension  
- compact

## CONFIGURATION GUIDE

Configuration example: [4330TY-W-H60](#)  
(to be customized with the references below)

4330	T	Y	W	H60
Reference	Pilote	Cable	Color	Color
				<b>H30</b> 3 LEDs with mixed optics <b>H60</b> 4 LEDs with mixed optics <b>L3</b> 3 LED with optics 100 x 12° <b>Other Optics</b> 4 LED
				<b>W</b> LED color
			<b>Ø</b> Cable Output <b>Y</b> Connector base	
		<b>Ø</b> 24 V PWM controllable <b>T</b> 230 V non-dimmable		
4330	SAINT-JEAN			