


EXTRAS SAINT-JEAN

4330

Wall-recessed & mast

SAINT-JEAN is a recessed spotlight with a slight 3 mm projection, or with no projection in the bollard version, specially designed for lighting pedestrian and cycle paths. Installed less than a meter from the ground, it offers a discreet and effective solution for illuminating large areas with long spacing, up to 6 meters. Thanks to its specific H30 and H60 optics, it provides even, appropriate lighting, ideal for

public spaces. The beam can be tilted from 0 to 30° without having to open the fixture, guaranteeing a perfect seal. Available with two different flush-mount pot sizes, SAINT-JEAN can also be customized with a powder-coated finish for optimum aesthetic integration. Versatile and elegant, it blends harmoniously into different urban environments.

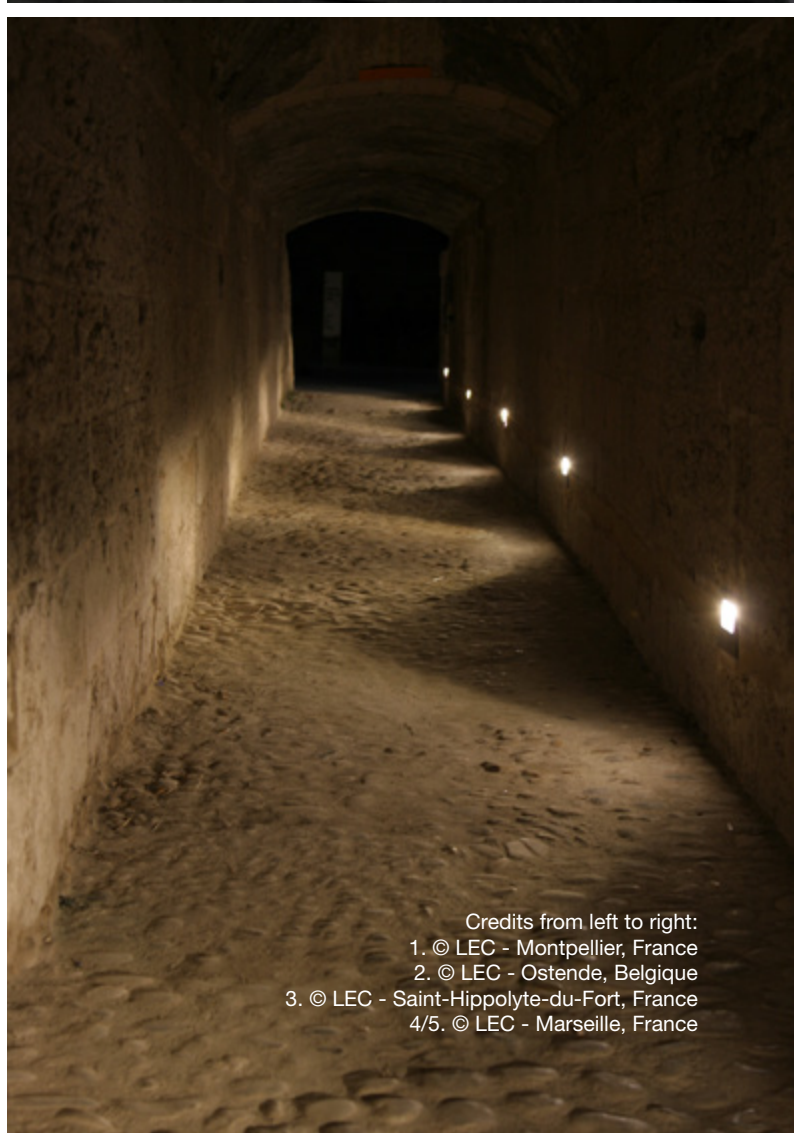

Credits from left to right:
1. © LEC - Montpellier, France
2. © LEC - Ostende, Belgique
3. © LEC - Saint-Hippolyte-du-Fort, France
4/5. © LEC - Marseille, France

FEATURES

LUMINAIRE'S BODY

Materials	Anodized aluminium
IP rating	IP67
IK rating	IK10 20 J - Not designed for vehicle traffic
Weight	2.08 kg
Cable length	100 cm
Features	1-axis adjustable Adjustable orientation without disassembly Adjustable tray: 0 to 30°
Integrated power supply	24 V dc + PWM (class III) 230 V ac - non-dimmable (class II)
Remote power supply in distant box	230 V ac -> 24 V dc + PWM Control possible via: 0-10 V, DMX, DALI, potentiometers



OPTICAL UNIT


Color temperature	2 200 K (A), 2 700 K (F), 3 000 K (E), 4 000 K (N), 6 000 K (W), Red (R), Amber (O), Green (V), Blue (L), Royal Blue (K)
Type of LED	Power LED
Maximum power consumption of all possible options	10.10 W
Optics	10°, 20°, 36°, 52°, 77°, 120°, 130 x 25° (L1), 116 x 44° (L2), 40 x 10° (L4), 100 x 20° (L7).
Number of LED	3 / 4
Reference flux*	892 lm

Product reference

4330

**This value, obtained at the luminaire output, corresponds to the optimum number and type of LEDs for warm white light (3,000 K).*

DIMENSIONS

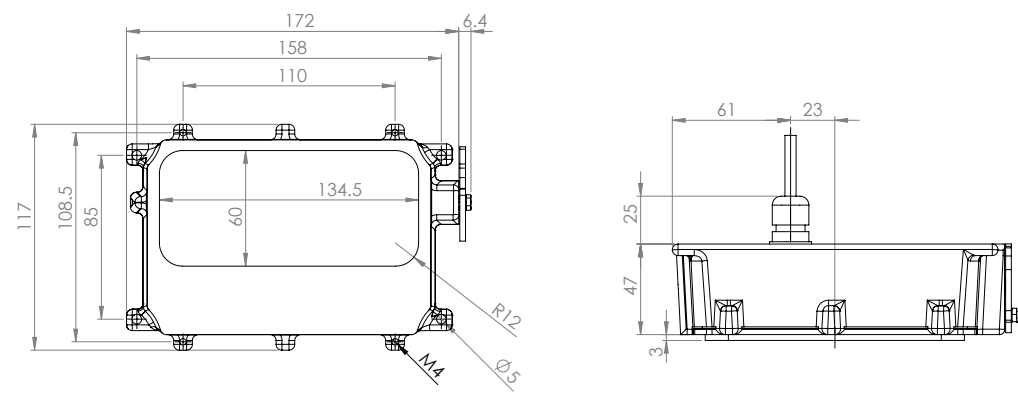

OPTIONS

RAL powder coating paint of your choice
Various angles of light beam opening

ACCESSORIES

Choice of recessed mountings for installation:
- with extension
- compact

CONFIGURATION GUIDE

Configuration example: [4330TY-W-H60](#)
(to be customized with the references below)

4330	T	Y	W	H60	
Reference	Pilote	Cable	Color	Color	
4330	SAINT-JEAN	Ø 24 V PWM controllable T 230 V non-dimmable	Ø Cable Output Y Connector base	W LED color	H30 3 LEDs with mixed optics
					H60 4 LEDs with mixed optics
					L3 3 LED with optics 100 x 12°
					Other Optics 4 LED